

# Central Tube Dielectric and Armored MicroUnitube


Single mode (ESMF), Multimode, Hybrid

## Applications

Multi-purpose Outdoor - aerial lashed, duct and direct buried.

## Specifications

<b>Constructions</b>	Dielectric, armored
<b>Fiber Count</b>	2 to 24 fibers in fiber bundles separated by color-coded binder threads
<b>Options</b>	Preconnectorized
<b>Performance</b>	ANSI/ICEA, IEC, RDUP, Telcordia GR-20
<b>Maximum Installation Load</b>	600 lbf (2,670N) - Armored 300 lbf (1,335N) - Dielectric
<b>Maximum Operation Load</b>	180 lbf (800N) - Armored 90 lbf (400N) - Dielectric
<b>Shipping and Storage</b>	-40°F to 167°F (-40°C to 75°C)
<b>Installation</b>	-22°F to 140°F (-30°C to 60°C)
<b>Operation</b>	-40°F to 158°F (-40°C to 70°C)

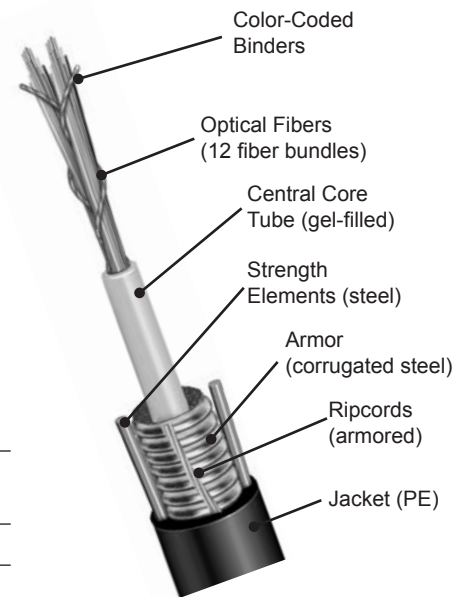

**Armored MicroUnitube**

## Features and Benefits

### Easy Cable Entry and Preparation

- Adhesive bond armor greatly improves mid-entry
- Ripcord speeds cable entry and outer jacket removal
- Single core tube allows quick access to fibers

### Multi-purpose Installation and Use

- Small diameter and light weight extend reel and installation lengths
- Corrugated steel tape armor provides mechanical protection and rodent resistance (armored version)