

Multi-Conductor Unshielded, Non-Plenum


Listed by UL as Type CMR and/or CL3R cables for use in NEC® Article 800 and/or 725 installations.

Specifications

Conductors	Stranded or solid, bare copper
Insulation	Premium-grade color-coded S-R PVC
Jacket	Gray PVC Suitable for use from -20°C to 75°C Suggested voltage rating of 300V

Applications

Wiring of intercom, security, audio, background music and power limited control circuits (2-4 conductor recommended for single channel use only).

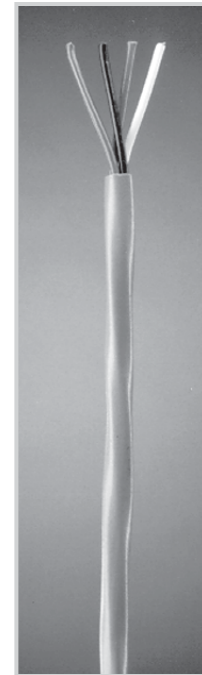

Part No.	No. of Cond.	AWG	Conductor Stranding	Nom. Ins. Thick. (in)	Nom. Jacket Thick. (in)	Nom. O.D. (in)	Weight (lbs/M-ft)
2C22B7NS	2	22	7/30	.008	.015	.122	10
3C22B7NS	3	22	7/30	.008	.015	.129	10
4C22B7NS	4	22	7/30	.008	.015	.156	20
6C22B7NS	6	22	7/30	.008	.015	.164	20
8C22B7NS	8	22	7/30	.008	.015	.180	30
10C22B7NS	10	22	7/30	.008	.015	.212	30
12C22B7NS	12	22	7/30	.008	.015	.219	40
2C20B7NS	2	20	7/28	.008	.015	.134	10
3C20B7NS	3	20	7/28	.008	.015	.134	15.5
4C20B7NS	4	20	7/28	.008	.015	.142	20
2C18B1NS	2	18	Solid	.009	.015	.144	20
2C18B7NS	2	18	7/26	.009	.015	.156	20
3C18B7NS	3	18	7/26	.009	.015	.166	25
4C18B7NS	4	18	7/26	.009	.015	.187	32
2C16B19NS	2	16	19/.0117	.009	.015	.178	25
4C16B19NS	4	16	19/.0117	.009	.015	.214	47
(CL3R only per NEC)							
2C14B19NS	2	14	19/.0147	.013	.015	.224	40
2C12B19NS	2	12	19/.0185	.013	.015	.260	60

See referenced pages in the Hardware & Supplies section:

Installation Hardware

- Acme 25A or 75A Staple Gun - I-3

Suggested Prep Tool

- 721 Multi-Wire Stripper/Cutter - I-9