


Indoor/Outdoor Station Wire

NEC® and UL specifications, UL Listed Type CMX

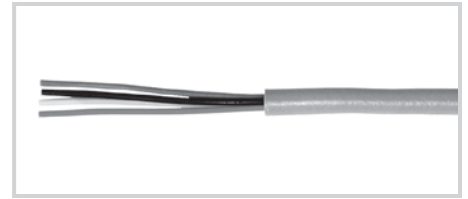

Specifications

| | |
|-------------------|--|
| Conductors | Solid, soft-drawn annealed bare copper |
| Insulation | High density PE, color-coded |
| Jacket | Flexible gray or beige PVC |

Application

Demarcation wire.

| Part No. | No. of Cond. | AWG | Insulation Thick. (in) | Nominal O.D. (in) | Weight (lbs/M-ft) |
|-----------|--------------|-----|------------------------|-------------------|-------------------|
| 4C24B1CMX | 4 | 24 | .01 | .132 | 15 |
| 2C22B1CMX | 2 | 22 | .01 | .124 | 12 |
| 3C22B1CMX | 3 | 22 | .01 | .135 | 15 |
| 4C22B1CMX | 4 | 22 | .01 | .150 | 18 |
| 5C22B1CMX | 5 | 22 | .01 | .185 | 22 |

| Color Ordering Chart | |
|----------------------|------------------------------|
| No. of Cond. | Colors |
| 2 | Red/Green |
| 3 | Red/Green/Yellow |
| 4 | Red/Green/Yellow/Black |
| 5 | Red/Green/Yellow/Black/White |

| Part No. | No. of Pairs | AWG | Insulation Thick. (in) | Nominal O.D. (in) | Weight (lbs/M-ft) |
|-----------|--------------|-----|------------------------|-------------------|-------------------|
| 2P22B1CMX | 2 | 22 | .01 | .185 | 18 |
| 3P22B1CMX | 3 | 22 | .01 | .200 | 26 |
| 4P22B1CMX | 4 | 22 | .01 | .235 | 34 |

| Color Ordering Chart | |
|----------------------|--------------|
| Pair | Colors |
| 1 | Blue/White |
| 2 | Orange/White |
| 3 | Green/White |
| 4 | Brown/White |

Category 5E CMR/CMX

Indoor/Outdoor

Specifications

| | |
|-------------------|---|
| Conductors | 24 AWG solid, annealed bare copper |
| Insulation | Polyolefin |
| Jacket | Tough, flame-retardant, weather- and abrasion-resistant PVC |

Part No. 4P24B1CMX5E



See referenced pages in the Hardware & Supplies section:

Installation Hardware

- Acme 25A Staple Gun - I-3

Suggested Prep Tool

- 721 Multi-Wire Stripper/Cutter - I-9