


Plenum Electronic Cable, Unshielded NEC® 725, Type CMP and/or CL2P UL Classified as to fire and smoke only

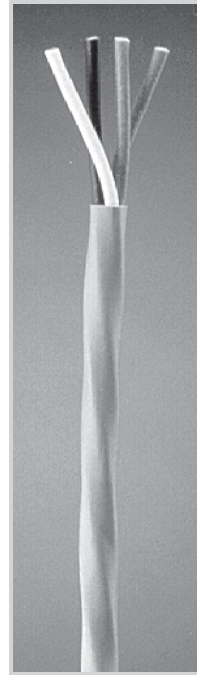

Specifications

Conductors	Solid bare copper, stranded bare copper
Insulation	Low smoke-producing, low flame-spread compounds
Jacket	Low smoke-producing, low flame-spread approved compounds

Applications

Security, audio, intercom, power limited control circuits; for installation through air plenums without metal conduit.

Part No.	No. of Cond.	AWG	Cond. Description	Nominal O.D. (in)	Weight (lbs/M-ft)
1P22B7NSP	1 pair	22	stranded bare	.115	16
4C22B7NSP	4	22	stranded bare	.140	25
6C22B7NSP	6	22	stranded bare	.160	28
8C22B7NSP	8	22	stranded bare	.180	32
10C22B7NSP	10	22	stranded bare	.192	40
12C22B7NSP	12	22	stranded bare	.220	46
1P18B1NSP	1 pair	18	solid bare	.132	22
1P18B7NSP	1 pair	18	stranded bare	.145	24
3C18B1NSP	3	18	solid bare	.140	28
3C18B7NSP	3	18	stranded bare	.155	30
4C18B1NSP	4	18	solid bare	.155	35
4C18B7NSP	4	18	stranded bare	.175	37
5C18B7NSP	5	18	stranded bare	.195	45
6C18B1NSP	6	18	solid bare	.215	52
6C18B7NSP	6	18	stranded bare	.215	52
8C18B1NSP	8	18	solid bare	.230	66
8C18B7NSP	8	18	stranded bare	.230	68
10C18B1NSP	10	18	solid bare	.280	82
10C18B7NSP	10	18	stranded bare	.280	82
1P16B7NSP	1 pair	16	stranded bare	.163	25
3C16B19NSP	3	16	stranded bare	.185	35
4C16B19NSP	4	16	stranded bare	.205	46
1P14B19NSP	1 pair	14	stranded bare	.196	40
3C14B19NSP	3	14	stranded bare	.240	54
4C14B19NSP	4	14	stranded bare	.265	70
1P12B7NSP	1 pair	12	stranded bare	.267	60
4C12B7NSP	4	12	stranded bare	.410	110

See referenced pages in the Hardware & Supplies section:

Installation Hardware

- Acme 25A or 75A Staple Gun - I-3

Suggested Prep Tool

- 721 Multi-Wire Stripper/Cutter - I-9