


Plenum Station Wire

NEC® and UL® specifications, UL Listed Type CMP

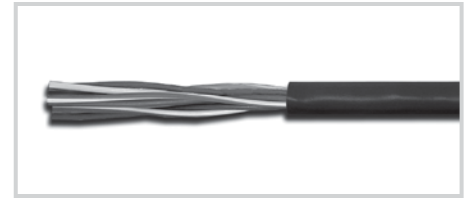

Specifications

Conductors	Solid, soft-drawn annealed bare copper
Insulation	Low smoke-producing, low flame-spread compounds with cross-reference
Configuration	Twisted pairs
Jacket	Low smoke-producing, low flame-spread approved compounds

See referenced pages in the Hardware & Supplies section:

Installation Hardware

- Acme 25A Staple Gun - I-3

Suggested Prep Tools

- 100 Adjustable Wire Stripper/Cutter - I-9

Application

Demarcation wire used inside the house.

Part No.	No. of Cond.	AWG	Insulation Thick. (in)	Nominal O.D. (in)	Weight (lbs/M-ft)
4C24B1CMP	4	24	.1	.132	12
2C22B1CMP	2	22	.1	.124	12
4C22B1CMP	4	22	.1	.145	20

No. of Cond.	Color Ordering Chart Colors
2	Red/Green
4	Red/Green/Yellow/Black

Cross-Connect Wire, PW

Specifications

Conductors	Solid, soft-drawn annealed bare copper
Configuration	Non-jacketed twisted pairs
Jacket	Solid, semi-rigid PVC with cross-reference band-marked color code



Application

Cross-connect termination boxes.

Part No.	No. of Pairs	AWG	Nominal O.D. (in)	Weight (lbs/M-ft)
1P24B1PW	1	24	0.08	5
2P24B1PW	2	24	0.13	8
3P24B1PW	3	24	0.16	12

See referenced pages in the Hardware & Supplies section:

Installation Hardware

- Acme 25A Staple Gun - I-3

Suggested Prep Tools

- 721 Multi-Wire Stripper/Cutter - I-9