


Siamese Coaxial Cable

Available with either dual coaxial cables or coaxial cable with a twisted pair and also in a plenum-rated design for installation in a drop ceiling or a raised floor.

These cables are easier to install than standard coaxial cables and are ideal for dual Direct Broadcast System (DBS) applications where one dish is used to serve two receivers. They also are critical for satellite hookup where a powered-pair cable is desired. Other applications for these coaxial cables include sound and security surveillance cameras where the coaxial cable transmits the audio/video signal and the twisted pair is used to control the pan and tilt function of the closed-circuit television (CCTV) camera.

In today's uncertain world, security installations are occurring at a double-digit growth rate. Security cameras are being installed in virtually every office, school and government facility, on highways and in traffic control centers as well as in most industrial, commercial and manufacturing facilities.

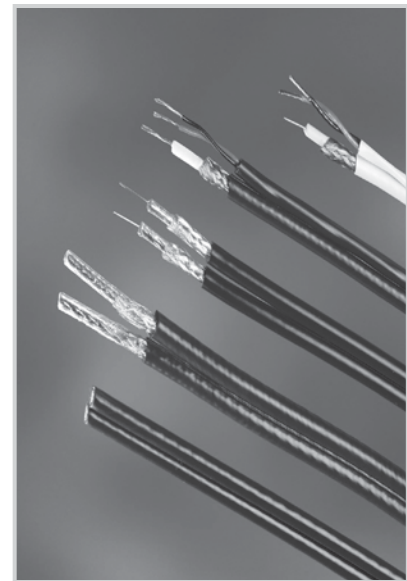

Part No.	Description	AWG	Conductor	Shield	Ohms	Jacket	Nom. O.D. (in)	Weight (lbs/M-ft)
2C18WI6DUAL	RG-6 - CATV	18	Solid CCS	Foil + 60% Alum. Braid	75	PVC	.270 x .595	60
3C18B1RG6U	RG-6 - CATV	18	Solid BC	Foil + 95% TC Pair 18 Stranded Unshielded	75	PVC	.270 x .493	78
2C20W159US	RG-59 - Dual CATV	20	Solid CCS	Foil + 67% Alum. Braid	75	PVC	.242 x .498	60
3C22X759U	RG-59 - CATV	22	Stranded BC	95% BC with Foil on	76	PVC	.242 x .445	75
3C20X159U1	RG-59 - CATV	20	Solid BC	95% BC	75	PVC	.238 x .440	75
3C20B059UP	RG-59 - CMP	20	Solid BC	95% BC	75	Plenum	.200 x .383	53

See referenced pages in the
Hardware & Supplies section:

Installation Hardware

- Collapsible Cable Caddy - I-3

Suggested Prep Tools

- Drop Cable Slitter DCS - H-7
- Coaxial Cable Cutter - I-5
- Universal Drop Trimmer - I-9